

Callpoints



CBG370S - Callpoint

Overview

Two versions of intelligent addressable callpoints are available in this range, the (CBG370S) which can be either surface or flush mounted and the (CBG370WP) which is a weatherproof version.

Both the (CBG370S) and the (CBG370WP) are compatible with the Cooper range of intelligent addressable fire systems.

These intelligent addressable callpoints are attractively designed, simple to install and are supplied as standard with a frangible glass element and a test key for ease of maintenance.

A comprehensive range of accessories are available to maximise the functionality of the callpoint for particular applications.


Features

- Soft addressed
- Integral short circuit isolator
- Single address
- Fast fit clip on front cover
- High visibility status LED
- Wide range of accessories
- Heavy duty terminals
- Two models available
 - Internal
 - Weatherproof

Benefits

- Quick and simple to install
- Single tool for test and access
- Robust construction
- IP65 version available
- Easy to maintain/service

Dimensions




Description	H (mm)	W (mm)	D (mm)
Flush Mounted	87	87	36
Surface Mounted	87	87	57
Weatherproof	87	87	59

Technical Specification

Code	CBG370S	CBG370WP
Description	Surface / Flush Mounting Callpoint	Weatherproof Callpoint
Standards	EN54 Pt11	EN54 Pt11
Specification		
Operating Voltage	17V dc to 32V dc	17V dc to 32V dc
Quiescent Current	< 250µA	< 250µA
Environmental		
Operating Temperature	-10°C to +55°C	-10°C to +55°C
Humidity (Non Condensing)	0 to 93% RH	0 to 93% RH
Physical		
Construction	PC/ABS	PC/ABS
Colour	Red	Red
Dimensions (H x W x D)	87mm x 87mm x 57mm (36mm flush)	87mm x 87mm x 59mm
Weight	0.2kg	0.2kg
Ingress Protection	IP42	IP65
Compatibility		
Suitable for use with	Cooper Intelligent Addressable Fire Systems	Cooper Intelligent Addressable Fire Systems

Standard Connection

CBG370S / CBG370WP

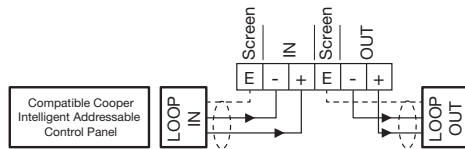

WARNING:
Do NOT use high voltage testers if ANY equipment is connected to the system.

Screen (Earth) must be continuous along entire length of loop.

Installation

1. Surface callpoint has standard rear BESA fixing facilities. In addition, back box can accept top or bottom surface entry cables. Surface callpoint can also be flush mounted.
2. Callpoint has test facility via special test key to prevent unauthorised operation.
3. Insertion of test key for test purposes and for cover removal is at bottom of callpoint to facilitate ease of access when mounted next to door architrave.
4. Test key is dual function, used to test callpoint operation by simulating activation and also to allow removal of clip on cover to gain access to element.
5. Element is held in place by clip on self locking cover which can only be removed by use of a special tool (callpoint test key).
6. Separate loop in and loop out terminals are provided for all connections including screen continuity on intelligent addressable callpoints.
7. Surface/flush callpoints are IP42, weatherproof is IP65.

User Interface

1. To enable quick and simple installation, callpoints use a fast fit self locking clip on front cover which is very simple to fit, but once in place, can only be removed by use of a special key (supplied).
2. Callpoint is triggered by pressing against the element.

Accessories

- Semi recess bezel
- Spacer plates
- Hinged clear cover
- Resettable plastic element
- Replacement test key
- Replacement glass elements
- Earth continuity links

Product Codes

Code	Description
CBG370S	Intelligent Addressable Surface/Flush Callpoint
CBG370WP	Intelligent Addressable Weatherproof Callpoint
CXPC	Protective Hinged Cover
MBGSP	Spacer Plates (pack of 10)
MBGBEZ	Recessing Bezels (pack of 10)
MBGREKIT	Resettable Element Kit (pack of 10)
UBSG	Spare Break Glasses (pack of 5)
MBG119	Earth Continuity Links (pack of 5)
MFBGKEY3	Callpoint Keys (pack of 10)

Descriptions represent only particulars of the goods to which they apply and do not form part of any contract. The company reserves the right to change specification without prior notification or public announcement.